

Emission of greenhouse gases from home aerobic composting, anaerobic digestion and vermicomposting of household wastes in Brisbane (Australia)

Yiu C Chan¹, Rajiv K Sinha¹ and Weijin Wang²

Abstract

This study investigated greenhouse gas (GHG) emissions from three different home waste treatment methods in Brisbane, Australia. Gas samples were taken monthly from 34 backyard composting bins from January to April 2009. Averaged over the study period, the aerobic composting bins released lower amounts of CH₄ ($2.2 \text{ mg m}^{-2} \text{ h}^{-1}$) than the anaerobic digestion bins ($9.5 \text{ mg m}^{-2} \text{ h}^{-1}$) and the vermicomposting bins ($4.8 \text{ mg m}^{-2} \text{ h}^{-1}$). The vermicomposting bins had lower N₂O emission rates ($1.2 \text{ mg m}^{-2} \text{ h}^{-1}$) than the others (1.5 – $1.6 \text{ mg m}^{-2} \text{ h}^{-1}$). Total GHG emissions including both N₂O and CH₄ were 463, 504 and 694 mg CO₂-e m⁻² h⁻¹ for vermicomposting, aerobic composting and anaerobic digestion, respectively, with N₂O contributing >80% in the total budget. The GHG emissions varied substantially with time and were regulated by temperature, moisture content and the waste properties, indicating the potential to mitigate GHG emission through proper management of the composting systems. In comparison with other mainstream municipal waste management options including centralized composting and anaerobic digestion facilities, landfilling and incineration, home composting has the potential to reduce GHG emissions through both lower on-site emissions and the minimal need for transportation and processing. On account of the lower cost, the present results suggest that home composting provides an effective and feasible supplementary waste management method to a centralized facility in particular for cities with lower population density such as the Australian cities.

Keywords

Greenhouse gases, home composting, vermicomposting, anaerobic digestion, organic waste

Date received: 26 October 2009; accepted: 14 May 2010

Introduction

Disposal of municipal solid waste (MSW) has been mainly through landfilling, incineration and centralized composting and anaerobic digestion facilities in urban areas around the world. These processes involve direct and indirect emissions of greenhouse gases (GHGs) including carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O) and non-methane hydrocarbons (NMHCs) and contribute to around 3–4% of the anthropogenic GHG emissions in terms of CO₂-equivalent (CO₂-e) (Pipatti and Savolainen, 1996; Australian Greenhouse Office, 2007; Papageorgiou et al., 2009). More than 70% of MSW is disposed of in landfills in Australian and overseas cities (Ernst, 1990; Aumonier, 1996; Queensland Environmental Protection Agency, 2002; Mohareb et al., 2008). Anaerobic decomposition of these

wastes in the landfills results in the emission of CH₄ and as such contributes significantly to the global greenhouse budget (Hobson et al., 2005). Disposal of MSW contributed 17 million tonnes CO₂-e of GHG emissions in Australia in 2005, equivalent to the emissions from 4 million cars or 2.6% of the national emissions (Australian Greenhouse Office, 2007).

Due to the challenge of climate change and other environmental concerns on landfills (Lisk, 1991), government

¹Griffith University, Nathan, QLD 4111, Australia.

²Department of Environment and Resource Management, 80 Meiers Rd, Indooroopilly QLD 4068, Australia.

Corresponding author:

Yiu C Chan, Griffith University, Nathan, QLD 4111, Australia
Email: a.chan@griffith.edu.au

authorities around the world have introduced regulations to phase out or reduce waste going to landfills (Murphy and Power, 2006; Lee et al., 2007; Department of Climate Change, 2007) and encouraged alternative waste management options (Nolan ITU Pty Ltd, 2004). The reduction of emissions from waste disposal has mainly been achieved by capturing the landfill gases and diversion of MSW (mainly by paper and material recycling) (Australian Greenhouse Office, 2007). Domestic food and garden wastes contribute 15–70% of the MSW in urban areas. Composting of domestic wastes in centralized facilities and/or at source by residents has been perceived to have great potential in reducing GHG emissions (Tchobanoglous et al., 1993; Wei et al., 2000). For example, the Victorian, New South Wales and South Australia Governments in Australia have set targets of increasing the recycling rate to up to 75% by 2010 by promoting the composting of organic waste (Zero Waste South Australia, 2005; Department of Climate Change, 2007; Victorian Government Department of Sustainability and Environment, 2009).

Three types of methods are common for the recycling of organic waste, namely aerobic composting, anaerobic digestion and vermicomposting. In aerobic composting the waste is aerated by air flowing constantly through the open system and by intermittent turning of the waste by the operator. Anaerobic digestion is carried out in the oxygen-deprived environment inside the closed chamber. Vermicomposting is similar to aerobic composting except that the composting and aeration processes are aided by the use of detritivorous worms. The type and emission rate of GHGs emitted from these processes, in particular household practices, have not been well studied (He et al., 2000). There have only been a small number of studies on the emission of GHGs from centralized composting and anaerobic digestion facilities. The findings from these studies indicate that GHG emissions are dependent on the method used and other factors such as the windrowing rate, age, depth, temperature and pore space of the compost mix (He et al., 2000; Hobson et al., 2005; Wihersaari, 2005; Lundie and Peters, 2005; Amon et al., 2006; Majumdar et al., 2006). Under aerobic composting conditions, the gas emitted is mainly CO₂ rather than CH₄ (Majumdar et al., 2006). Since this CO₂ is biogenic in origin it is usually not counted in the GHG emission budget (Intergovernmental Panel on Climate Change, 2007; Department of Climate Change, 2007). Emission of NMHCs has been found to be relatively small compared to emissions of CH₄ and N₂O. Anaerobic digestion has been found to emit more CH₄ than aerated composting (Mata-Álvarez et al., 2000). These findings show that the use of different methods under different conditions could result in very different type and amount of GHGs (Beck-Friis et al., 2000). More information is required on the actual effectiveness of different methods and conditions on GHG reduction.

The aim of this study was to investigate GHG emissions from different types of household organic waste treatment methods (aerobic composting, anaerobic digestion and vermicomposting) in relation to environmental conditions and the properties of the waste materials. The result will assist in the identification of better MSW management systems and practices with maximum GHG mitigation potential.

Materials and methods

Experimental design

This study was undertaken in 15 suburbs within 20 km from the Brisbane Central Business District (27.5°S 153°E) in south-east Queensland of Australia (Fig. 1). Brisbane has a population of 1.95 million and a population density of 380 people km⁻² in 2008 (Australian Bureau of Statistics, 2009). Twenty-two volunteer households with 11 aerobic composting bins, 12 anaerobic digestion bins and 11 vermicomposting bins in total were involved in this study. The bins were located either in the backyard or front yard of the households.

Results of a survey conducted at the beginning of the study showed that the households in this study composted on average 4–5 kg of food and green waste in each bin each week. Similar to those reported in literature (Tchobanoglous et al., 1993), the waste the households composted in this study was about 50–70% food waste (mainly fruits and vegetables remnants and food left-over) and 30–50% green waste (mainly grass clipping). The actual mass and composition of waste and the maintenance of the bins varied among the volunteers. Most of the volunteers added the waste daily and retrieved the compost products monthly.

The bins used were commercially available from hardware stores with a volume of approximately 220 L (Fig. 2). The aerobic bins have ventilation slots to facilitate airflow through them. The anaerobic bins were only opened during the addition of waste and retrieval of compost, and represent an anaerobic digester when the lid is closed. The vermicomposting bins are similar in structure to the aerobic bins but with a reservoir at the bottom to collect the leachates. The vermicomposting bins normally contained approximately 1500–2000 worms. Tiger Worm (*Eisenia fetida*), Indian Blue Worm (*Perionyx excavatus*), African Night Crawler (*Eudrilus euginae*) and Red Worm (*Lumbricus rebellus*) were the main worm species found in the vermicomposting bins in this study (Sinha et al., 2002). General instructions and guidance were also provided to the volunteers on the proper operation of the three types of systems. The vermicomposting bins were placed in shaded area. Meat products were not used, but dried grass clippings (high in carbon) were added to the food waste (high in nitrogen) to maintain a carbon to nitrogen (C/N) ratio close to 25 to 1. Bulking agents such as mulches were also added in aerobic composting and vermicomposting bins to increase air pockets.

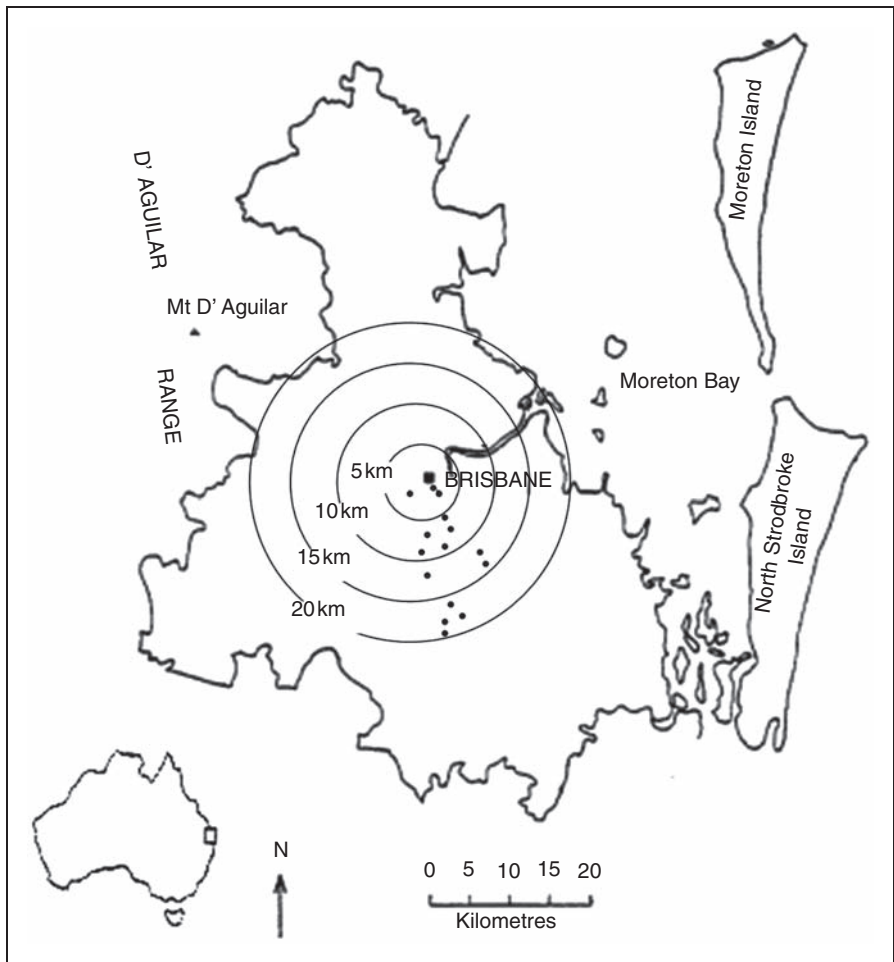


Figure 1. The 15 Brisbane suburbs of the volunteer households in this study (represented by the round dots in the figure).

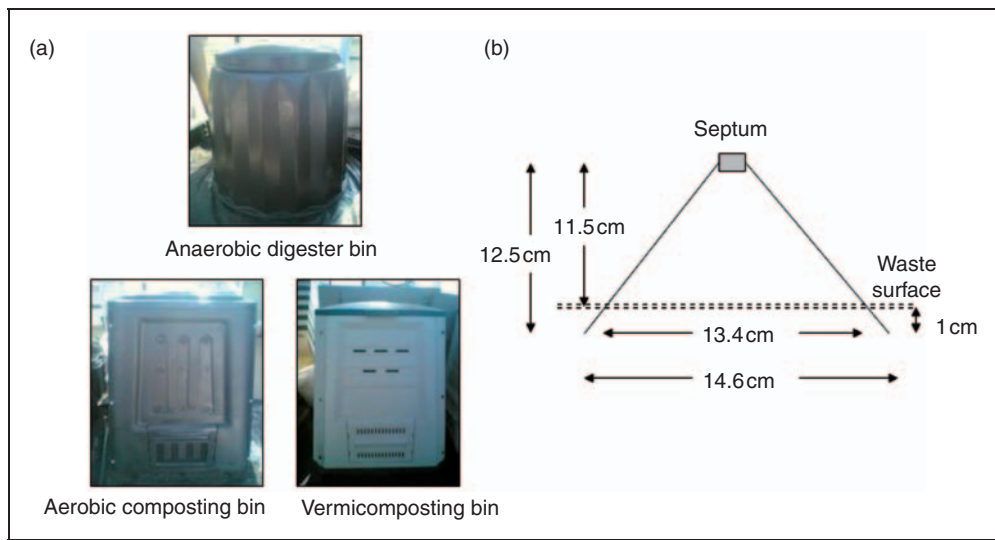


Figure 2. Examples of: (a) anaerobic digester, aerobic composting and vermicomposting bins; and (b) funnel static chamber used to collect the greenhouse gas samples.

Waste in the aerobic composting bins was turned weekly. Water was sprinkled in the bins to maintain a moisture content of 50–60% for the aerobic composting and anaerobic digestion bins and 60–70% for the vermicomposting bins. A two-bin rotating system was also recommended to allow 2–3 months for the compost to mature, although most of households in this study operated only one bin.

Sampling of CO_2 , CH_4 and N_2O

Gas samples were collected during the last weekend of each month during January–April 2009. This period covers the humid summer and autumn seasons in Brisbane. In total 132 samplings were conducted (43 from aerobic bins, 45 from anaerobic bins and 44 from vermicomposting bins). Gas samples were taken by using the static chamber method (Zhang et al., 2008). A 0.7 L glass funnel with the stem cut off and replaced with a removable septum was used as the collection chamber (Figure 2). Duplicate sampling from different areas on the waste surface indicates good precision in results (relative standard deviation <25% in general).

In each sampling, the inverted funnel with the septum removed was first pushed approximately 1 cm deep into the waste surface inside the bin. The rim of the funnel was wrapped around with waste and water applied if needed to provide a good air seal. The open funnel was left inside the bin with the lid of the bin closed for approximately 5 min before the septum was put back onto the funnel. Then the first air sample was taken from inside the funnel by inserting a 30 mL syringe through the septum. The air sample was then transferred from the syringe into an evacuated container. The bin was closed again for approximately 30 min then the second air sample was taken. Results from preliminary samplings show that the 30-min duration was sufficient to produce precise results comparable to the results of longer duration.

Environmental and waste parameters including ambient temperature, temperature near the waste surface (at 2 cm below the surface) and inside the waste (at 8 cm below the surface), and the pH and moisture content in the waste were also determined. pH and moisture content were determined with a soil pH and moisture tester (Takemura Electric Works Model DM-15) by inserting the tester at three random positions to approximately 7 cm deep into the surface. DM-15 scales moisture content from 1 to 8. Most of the composting bins in this study returned a high moisture scale of 8 or beyond. Moisture-scale readings beyond 8 were treated as 9 in the statistical analysis. The measured values from the replicate samplings were within $\pm 2.8^\circ C$, ± 1.0 pH and ± 1.2 moisture scale. Measurements of a set of compost–water mixtures with varying mass percentage of moisture showed that moisture scale 1 was equivalent to a moisture content of approximately 20%, whereas moisture scale 8 was equivalent to approximately 33%.

Analysis of CO_2 , CH_4 and N_2O and estimation of GHG emission rates

The gas samples in the containers were analysed by a gas chromatograph (Varian 3800) within one week after the sampling. The gas chromatograph was equipped with a thermal conductivity detector (GC-TCD), a flame ionization detector (GC-FID) and an electron capture detector (GC-ECD) for the analysis of CO_2 , CH_4 and N_2O , respectively. Dual Porapak columns using helium as the carrier gas for CO_2 and CH_4 , and nitrogen as the carrier gas for N_2O were used in the analysis. CO_2 standards of 513, 1000, 2009 and 4020 ppm were used for the calibration of results, while 1.8 and 5.1 ppm standards were used for CH_4 and 0.50, 5.02, 12.1 and 18.7 ppm standards were used for N_2O .

The concentrations of CO_2 , CH_4 and N_2O in the two samples collected from each sampling were used to estimate the emission rate of the GHGs from the bin. The emission rate in $mg\ m^{-2}\ h^{-1}$ was calculated by Equation (1), based on the ideal gas equation:

$$\text{Rate}(mg\ m^{-2}\ h^{-2}) = (C_2 - C_1) \times MW \times V / (0.08206 \times T \times A_1 \times D) \quad (1)$$

where C_1 and C_2 are the concentrations of the GHG in ppm in the two samples; MW is the molecular weight of the GHG; V is the volume of air above the waste surface inside the funnel = $5.44 \times 10^{-4}\ m^3$; A_1 is the area of the waste surface inside the funnel = $1.42 \times 10^{-2}\ m^2$ (Fig. 2); T is the temperature in Kelvin; D is the duration between the two samples in hours. The emission rate in terms of kg GHG kg^{-1} waste was estimated by Equation (2):

$$\text{Rate}(kg\ GHG\ kg^{-1}\ waste) = \text{Rate}(mg\ m^{-2}\ h^{-1}) \times A_2 \times 24 \times 7 \times 10^{-6} / W \quad (2)$$

where A_2 is the area of the waste surface inside the composting bin and W is the amount of food and green waste treated each week. The area of the waste surface was approximately $0.24\ m^2$ for the anaerobic bins and $0.25\ m^2$ for the aerobic and vermicomposting bins. The volunteers in this study added waste and retrieved compost products on a regular basis and W was assumed to be 4.5 kg. The CO_2 -equivalents (CO_2 -e) of CH_4 and N_2O were estimated using the global warming potential of 21 and 310, respectively (Intergovernmental Panel on Climate Change, 2007).

Statistical analysis

Five of the 132 samplings conducted were found to have extreme CH_4 and/or N_2O emission rate values (beyond average +4 s.d.) and were thus excluded from the statistical analysis. All the measured parameters were tested for normality by using the Kolmogorov–Smirnov test

(Beck-Friis et al., 2000). At the significance level of 0.05, the emission rates of CO₂, CH₄ and N₂O were found to be log-normally distributed, and consequently the natural logarithmic values of these parameters were used in statistical comparison.

Pearson correlation analysis was used to investigate the correlation between the emission rates of the GHGs and the other measured parameters (Beck-Friis et al., 2000). ANOVA *F*-test was used to identify the influencing factors (waste treatment method, month of sampling and time of the day of sampling) of the GHG emission rates. Then a *t*-test (least significant difference, LSD) was used to investigate the influence of the identified factors on the emission rates. The significance level of 0.05 was used in these statistical tests. In this study, the samplings were conducted between 0800 and 1900 h, therefore the time of the day of sampling was categorized as ‘am’ (0800–1000 h), ‘noon’ (1100–1300 h), ‘pm’ (1400–1600 h) or ‘late pm’ (1700–1900 h).

Results and discussion

Emission rates of GHGs

A summary of the GHG emission rates and the environmental and waste parameters measured in this study is presented

in Table 1. Anaerobic bins and vermicomposting bins emitted significantly higher amounts of CO₂ and CH₄ than the aerobic bins. This indicates that anaerobic bins and vermicomposting bins were more efficient in decomposing the carbon in waste into CO₂ and more favourable for CH₄ production than the aerobic bins.

On the other hand, aerobic bins and anaerobic bins emitted significantly higher amounts of N₂O than the vermicomposting bins. Presumably, the N₂O emitted from the composting bins were mainly from the denitrifying process in the anaerobic zones in the compost, but might also be created in the nitrifying process in aerobic zones (Beck-Friis et al., 2000) and the activities of the denitrifying bacteria within the earthworm gut (Hobson et al., 2005). The lower emission of N₂O from vermicomposting bins indicated that the emission of N₂O from worm gut was probably offset by the reduction of anaerobic denitrification, due to the burrowing action of the earthworms.

On the contrary, Hobson et al. (2005) found that for larger scale systems windrow composting emitted more CH₄ but less N₂O than vermicomposting. This indicates that the process and rate of decomposition of organic materials in larger scale systems could be very different to those in home systems, due to the different level of ventilation and different worm density in the two types of systems.

Table 1. Summary of GHG emission rates and regulating factors (min - max values in bracket)

Parameters	Aerobic bins	Anaerobic bins	Vermicomposting bins
Number of samples	40	45	42
GHG emissions (mg m ⁻² h ⁻¹)			
CO ₂ ^a	882 ^B [23–5764]	2950 ^A [91–10069]	1675 ^A [146–5669]
CH ₄ ^b	2.17 ^B [0.00–38.05]	9.54 ^A [0.00–52.90]	4.76 ^A [0.00–40.89]
N ₂ O ^c	1.48 ^A [0.01–16.25]	1.59 ^A [0.00–16.37]	1.17 ^B [0.00–24.78]
Total emissions (mg CO ₂ -e m ⁻² h ⁻¹)			
Excluding CO ₂	504 [4–5038]	694 [0.76–5073]	463 [4–8475]
Including CO ₂ ^d	1386 ^B [28–7554]	3644 ^A [259–14351]	2138 ^A [189–14144]
Average % of GHG emissions			
Excluding CO ₂			
CH ₄	9.1	28.8	21.7
N ₂ O	90.9	71.2	78.3
Including CO ₂			
CO ₂	63.6	80.9	78.3
CH ₄	3.3	5.5	4.7
N ₂ O	33.1	13.6	17.0
Average GHG emissions (kg CO ₂ -e kg ⁻¹ waste)			
Excluding CO ₂	0.0047	0.0062	0.0043
Ambient temperature (°C)	28.7 [20.0–35.0]	28.1 [20.0–34.5]	28.5 [20.0–34.0]
Temperature below 2 cm (°C)	30.2 [26.0–41.5]	31.6 [24.0–45.0]	26.9 [22.5–32.0]
Temperature below 8 cm (°C)	31.2 [26.0–48.0]	32.4 [25.0–46.0]	27.1 [22.0–31.0]
pH	5.7 [3.1–6.7]	5.9 [4.1–6.7]	6.6 [5.8–7.0]
Moisture scale	6.4 [2.0–9.0]	6.8 [2.0–9.0]	8.2 [2.9–9.0]
Equivalent moisture content (%)	31 [25–>33]	31 [25–>33]	32 [26–>33]

^aLSD *t*-test shown that the waste treatment methods denoted by a superscript ‘A’ on their CO₂ emission values emitted significantly more CO₂ on average than those denoted by a superscript ‘B’ at the significance level of 0.05; ^{b,c,d}and similarly for CH₄, N₂O and total emissions.

Beck-Friis et al. (2000) found that the co-existence of both anaerobic and aerobic conditions was not apparent in small, intensively managed compost heaps, therefore resulting in less CH₄ and N₂O emissions. In their study, a very high level of CH₄ emission was found from large compost heaps. They also found that N₂O emissions tended to be higher in compost heaps after prolonged storage. In this sense home composting systems reduce N₂O emissions because the owners retrieve compost products more frequently.

In terms of CO₂-e, CO₂ emissions contributed approximately 64% on average of the total GHG emissions in the aerobic bins, and about 80% of the total GHG emissions in the anaerobic bins and vermicomposting bins. When CO₂ emission was excluded from the accounting as is common practice, the three waste treatment methods emitted 463–694 mg CO₂-e m⁻² h⁻¹ on average, largely attributable to N₂O emissions. LSD *t*-test showed that in terms of CO₂-e and with CO₂ emission included, anaerobic bins and vermicomposting bins emitted significantly higher amounts of GHGs than the aerobic bins. When CO₂ emission was excluded, however, there was no significant difference in the total GHG emissions between the three waste treatment methods.

Variation in GHG emissions in relation to environmental conditions and waste properties

The environmental conditions and waste properties for the three waste treatment methods are shown in Table 2.

The temperature inside the waste in this study (26–48°C) was lower than the optimum temperature (45–55°C) suggested by Jäckel et al. (2005) for the oxidation of CH₄. However, given the much smaller size of the waste heaps for the home systems, attaining the optimum temperature may not be possible under normal circumstances. The temperature at 8 cm below the waste surface was higher than that at 2 cm below the surface in the aerobic and anaerobic bins. They were correlated to and higher than the ambient temperature ($r > 0.32$), reflecting the biological activities in the waste. However, in the vermicomposting bins the temperature inside the waste was rather uniform and slightly lower than the ambient temperature. This could be due to the movement of the earthworms inside the waste making the temperature in the waste more uniform. Furthermore, the owners of the vermicomposting bins tend to moisturize their bins more often, therefore effectively reducing the temperature in the waste in the summer months. The moisture content was also significantly higher in the vermicomposting bins.

The pH value of the waste was acidic to neutral (5.8–7.0) in all the waste treatment methods, which was within the range of international control standards on pH of composts (6.0–8.5; Wei et al., 2000; Tsai, 2008).

Large variations in emission rates have been reported by other researchers for samples taken at different time of the day (Christensen et al., 1996). The temporal trends of GHG emissions in this study are shown in Table 3. The emission of CO₂ was not significantly different in the different months, and was higher at noon and lower in late afternoon. This is

Table 2. Comparison of the average environmental conditions and waste properties for different composting systems and at different times

	Ambient temperature [°C] ^a	Temperature at 2 cm below the waste surface [°C] ^b	Temperature at 8 cm below the waste surface [°C] ^c	pH ^d	Moisture scale [Equivalent % moisture] ^e
Aerobic	28.7	30.2 ^A	31.2 ^A	5.7 ^C	6.4 [31] ^B
Anaerobic	28.1	31.6 ^A	32.4 ^A	5.9 ^B	6.8 [31] ^B
Vermicomposting	28.5	26.9 ^B	27.1 ^B	6.6 ^A	8.2 (>33) ^A
January	25.9 ^B	30.1	31.5 ^A	5.8 ^B	8.0 (>33) ^A
February	31.3 ^A	30.6 ^A	30.9	6.1 ^A	7.4 [31] ^D
March	29.8 ^A	29.2	29.8	6.2 ^A	6.2 [31] ^{B,E}
April	26.2 ^B	28.5 ^B	28.7 ^B	6.1 ^A	6.9 [31] ^B
am	29.3 ^A	29.0	29.6	5.9 ^A	5.9 [30] ^{B,E}
noon	29.3 ^A	30.0	30.7	6.3 ^A	7.4 [31] ^D
pm	30.0 ^A	30.1	30.6	6.1 ^A	6.8 [31] ^B
late pm	22.4 ^B	28.3	29.1	5.6 ^B	8.2 (>33) ^A

^{a,b,c}The waste treatment methods (and similarly the months and the times of the day) denoted by a superscript 'A' on the temperature values were significantly higher in the temperature on average than those denoted by a superscript 'B', and so forth; ^{d,e}and similarly for pH and moisture scale. Also those denoted by a superscript 'D' were significantly higher in moisture scale on average than those denoted by a superscript 'E'.

probably due to the higher temperature at noon speeding up the decomposition of organic material in waste. On the other hand the emissions of CH₄ and N₂O did not show any consistent temporal trends.

In the aerobic composting and vermicomposting bins, CO₂ (*r* > 0.45) and CH₄ (*r* > 0.63) emissions were related to the temperature inside the waste, whereas N₂O emission was not. These findings are different to those of Beck-Friis et al. (2000) and Amlinger et al. (2008) in which N₂O emission was found to be related to waste temperature, perhaps because of the different size of the compost heaps in their studies and this study. Higher emission of CH₄ from wet waste stock has been reported by Brown and Subler (2007) but this relationship was not significant in this study. In the anaerobic bins, CO₂ emission was correlated to both the temperature (*r* > 0.33) and moisture content (*r* = 0.32) inside the waste. CH₄ emission correlated to moisture content only (*r* = 0.32), whereas N₂O emission correlated to temperature in the waste only (*r* > 0.48). There were smaller variations in temperature, pH and moisture content in the vermicomposting bins. No significant relationship between these factors and CO₂ and N₂O emissions was found, but CH₄ emission increased with increasing temperature in the vermicompost (*r* > 0.40).

Implications on the environmental benefits of home aerobic composting, vermicomposting and anaerobic digestion

The equivalent emission rate of GHGs in kg CO₂-e kg⁻¹ waste for the three waste treatment methods, excluding CO₂ emissions, are listed in Table 1. The average GHG emissions from the home systems in this study (0.0043–0.0062 kg CO₂-e kg⁻¹ waste) were generally lower than those estimated in studies of the centralized waste

Table 3. Temporal variations in GHG emissions [averages in mg CO₂-e m⁻² h⁻¹]

	Total GHG excluding CO ₂	Total GHG including CO ₂ ^a	CO ₂ ^b	CH ₄	N ₂ O
January	321	2371	2050	5.51	0.66
February	805	2903	2099	6.41	2.16
March	751	2710	1959	6.32	1.99
April	317	1652	1335	4.13	0.74
am	639	2661 ^A	2023	6.05	1.65
noon	848	3143 ^A	2295 ^A	6.95	2.27
pm	313	1822 ^B	1509	4.18	0.73
late pm	338	1910 ^B	1572 ^B	5.33	0.73

^aThe months [and similarly the times of the day] denoted by a superscript 'A' on their GHG emission values emitted significantly more GHG on average than those denoted by a superscript 'B';
^band similarly for CO₂ emission.

management options (Mata-Álvarez et al., 2000; Fukumoto et al., 2003; Department of Climate Change, 2008; Amlinger et al., 2008; Lou and Nair, 2009). These studies were generally based on the life-cycle analysis approach, using default GHG emission factors for MSW (Intergovernmental Panel on Climate Change, 2007; Department of Climate Change, 2007). For example, in the case of landfilling, the emission of N₂O is regarded as negligible (Pipatti and Savolainen, 1996; Department of Climate Change, 2007). There are no GHG emission rate values available for household systems in these protocols. This raises the question of the applicability of these default average GHG emission rates to different waste treatment processes and under different climate conditions (Beck-Friis et al., 2000).

Although life-cycle analysis is beyond the scope of this study, the findings from this study have implications on the environmental benefits of home aerobic composting, vermicomposting and anaerobic digestion of MSW in countries such as Australia. Results from life-cycle analysis studies often indicate centralized composting and anaerobic digestion facilities as preferable to landfilling and incineration, due to lower GHG emissions in the processes and the higher potential of recovery of methane gas for fuel use (Murphy and Power, 2006). It has been found that for a centralized composting facility, the GHG emissions due to kerbside separation and collection of waste and the use of machinery for processing and turning the waste at the facility could contribute a considerable amount of GHG emissions (Lundie and Peters, 2005; Lou and Nair, 2009). Apart from greenhouse impacts, the waste separation, transportation and processing activities contribute substantially to the management cost. For example, in Victoria (Australia) the cost of kerbside collection is approximately 18% of the management costs (Victorian Government Department of Sustainability and Environment, 2009). This cost is particularly higher for cities with low population density, such as Australian cities (Lundie and Peters, 2005; Victorian Government Department of Sustainability and Environment, 2009). Home composting of organic waste in urban areas will reduce the GHG emissions and cost not only from the above-mentioned processes, but also from transportation of compost products and chemical fertilizers to the households and crop growers (Lou and Nair, 2009).

As discussed in the previous section, all three types of systems investigated in this study have similar potential in reducing GHG impacts in comparison with the other waste treatment options. However, the findings from this study show that properly maintained vermicomposting systems have a greater potential of reducing N₂O emissions while producing more neutral compost products in comparison with the other methods. Vermicomposting also results in more efficient digestion of the carbon content in organic waste. As such the compost products from these processes should have lower C/N ratios and better quality. In addition,

Mitchell et al. (1980) found that earthworms also decrease emission of volatile sulfur compounds which are readily emitted from the conventional microbial composting process. Lazcano et al. (2008) found that earthworms promoted the retention of nitrogen and gradual release of phosphorus as well as reduction in electrical conductivity, therefore producing improved organic fertilizers for agricultural uses in comparison with the aerobic thermophilic composting.

According to the Queensland Environmental Protection Agency (2002), about half of the domestic solid waste in Brisbane is food and green waste. Approximately 130 kg green waste and 190 kg food waste were generated per person per year in Queensland (Australia). This is equivalent to about 3.5 kg green and food waste per day for a typical family of two adults and two children. From the survey and observation made in the study, the households composted approximately 4–5 kg of food and green waste each week on average. This amount is equivalent to about 20% of the food/green waste generated and is also well within the typical treatment capacity of 30–50 kg month⁻¹ of the home systems. A combination of home composting and other MSW management alternatives including recycling and centralized composting and anaerobic digestion offers great potential in reducing the GHG impact and management cost in the waste sector.

Conclusion

This study investigated the rate of emission of GHGs from different types of home composting bins. On average, aerobic composting, anaerobic digestion and vermicomposting bins released 504, 694 and 463 CO₂-e m⁻² h⁻¹ as N₂O and CH₄, with N₂O accounting for >80% of total emissions. These emission rates are equivalent to 0.0043–0.0062 kg CO₂-e kg⁻¹ waste of GHGs assuming 4.5 kg green waste were processed in each bin each week. Among the three types of bins, vermicomposting bins had the lowest emission of N₂O.

The GHG emissions generally increased with increasing temperature and/or moisture content. This indicates the importance of proper maintenance of the bins to minimize GHG emissions. Overall, vermicomposting provided more stable and favourable composting conditions than the other two systems.

The findings from this study indicate that smaller scale home systems tend to emit less GHGs when compared with larger scale systems. Other studies on the environmental impacts of the mainstream MSW management options have found centralized composting and anaerobic digestion facilities preferable to landfilling and incineration. Home composting and anaerobic digestion have the potential to further reduce GHG emissions associated with separation, transport and processing of the waste as well as transport of the compost products and fertilizers to the users.

Among the three systems, vermicomposting showed greater potential to provide better composting conditions and compost products with lower carbon/nitrogen ratio.

Acknowledgements

Special thanks to the Brisbane households who participated in the sampling programme. Thanks are also due to Mr Kurnal Chauhan and Mr Kulvaibhav Singh for conducting the sampling programme and to Mr Steven Reeves for analysing the gas samples and proofreading the manuscript. This project was supported by the NRMA Insurance's Community Help Grants Program 2008.

References

- Amlinger F, Peyr S and Cuhls C (2008) Greenhouse gas emissions from composting and mechanical biological treatment. *Waste Management and Research* 26: 47–60.
- Amon B, Kryvoruchko V, Amon T and Sechmeister-Boltenstern S (2006) Methane, nitrous oxide and ammonia emissions during storage and after application of dairy cattle slurry and influence of slurry treatment. *Agriculture, Ecosystems and Environment* 112: 153–162.
- Aumonier S (1996) The greenhouse gas consequences of waste management – identifying preferred options. *Energy Conversion Management* 37: 1117–1122.
- Australian Greenhouse Office (2007) *National Greenhouse Gas Inventory 2005*. Canberra: Department of Environment and Water Resources, Australian Greenhouse Office.
- Australian Bureau of Statistics (2009) <http://www.abs.gov.au/> Accessed 1 October 2009
- Beck-Friis B, Sonesson U, Jönsson H and Kirchmann H (2000) Formation and emission of N₂O and CH₄ from compost heaps of organic household waste. *Environmental Monitoring and Assessment* 62: 317–331.
- Brown A and Subler S (2007) Composting and greenhouse gas emissions: a producer's perspective. *Biocycle*, March/2007, 37–41.
- Department of Climate Change (2007) *Australian Methodology for the Estimation of Greenhouse Gas Emissions and Sinks 2006*. Canberra: Department of Climate Change, National Greenhouse Gas Inventory Committee.
- Department of Climate Change (2008) *National Greenhouse and Energy Reporting (Measurement) Determination*. Chapter 5. Canberra: Waste. Department of Climate Change.
- Ernst AA (1990) A review of solid waste management by composting in Europe. *Resources, Conservation and Recycling* 4: 135–149.
- Fukumoto Y, Osada T, Hanajima D and Haga K (2003) Patterns and quantities of NH₃, N₂O and CH₄ emissions during swine manure composting without forced aeration – effect of compost pile scale. *Bioresource Technology* 89: 109–114.
- He Y, Inamori Y, Mizuochi M, Kong H, Iwami N and Zun T (2000) Measurements of N₂O and CH₄ from the aerated composting of food waste. *The Science of the Total Environment* 254: 65–74.
- Hobson A, Frederickson J and Dise N (2005) CH₄ and N₂O from mechanically turned windrow and vermicomposting systems following in-vessel pre-treatment. *Waste Management* 25: 345–352.
- Intergovernmental Panel on Climate Change (2007) *Climate Change 2007: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change*. Chapter 2. Cambridge, UK: Changes in Atmospheric Constituents and in Radiative Forcing. Cambridge University Press.
- Jäckel U, Thummes K and Kämpfer P (2005) Thermophilic methane production and oxidation in compost. *FEMS Microbiology Ecology* 52: 175–184.
- Lazcano C, Gómez-Brandón M and Domínguez J (2008) Comparison of the effectiveness of composting and vermicomposting for the biological stabilization of cattle manure. *Chemosphere* 72: 1013–1019.
- Lee SH, Choi KI, Osako M and Dong JI (2007) Evaluation of environmental burdens caused by changes of food waste management systems in Seoul, Korea. *Science of the Total Environment* 387: 42–53.

- Lisk DJ (1991) Environmental effects of landfills. *The Science of the Total Environment* 100: 415–468.
- Lou XF and Nair J (2009) The impact of landfilling and composting on greenhouse gas emissions – a review. *Bioresource Technology* 100: 3792–3798.
- Lundie S and Peters G (2005) Life cycle assessment of food waste management options. *Journal of Cleaner Production* 13: 275–286.
- Majumdar D, Patel J, Bhatt N and Desai P (2006) Emission of methane and carbon dioxide and earthworm survival during composting of pharmaceutical sludge and spent mycelia. *Bioresource Technology* 97: 648–658.
- Mata-Álvarez J, Mace S and Llabrés P (2000) Anaerobic digestion of organic solid wastes. An overview of research achievements and perspectives. *Bioresource Technology* 74: 3–16.
- Mitchell MJ, Horner SG and Abrams BL (1980) Decomposition of sewerage sludge in drying beds and the potential role of the earthworm. *Eisenia fetida*. *Journal of Environmental Quality* 9: 373–378.
- Mohareb AK, Warith MA and Diaz R (2008) Modelling greenhouse gas emissions for municipal solid waste management strategies in Ottawa, Ontario, Canada. *Resources, Conservation and Recycling* 52: 1241–1251.
- Murphy JD and Power NM (2006) A technical, economic and environmental comparison of composting and anaerobic digestion of biodegradable municipal waste. *Journal of Environmental Science and Health Part A* 41: 865–879.
- Nolan ITU Pty Ltd (2004) *Assessment of domestic waste and recycling systems. Final report*. Parramatta, NSW: New South Wales Department of Environment and Conservation.
- Papageorgiou A, Barton JR and Karagiannidis A (2009) Assessment of the greenhouse effect impact of technologies for energy recovery from municipal waste: A case for England. *Journal of Environmental Management* 90: 2999–3012.
- Pipatti R and Savolainen I (1996) Role of energy production in the control of greenhouse gas emissions from waste management. *Energy Conversion Management* 37: 1105–1110.
- Queensland Environmental Protection Agency (2002) *Green and Organic Waste Processing and Marketing in Queensland*. Brisbane, QLD: Queensland Environmental Protection Agency.
- Sinha RK, Herat S, Agarwal S, Asadi R and Carretero E (2002) Vermiculture technology for environmental management: study of action of earthworms *Elsinia foetida*, *Eudrilus euginae* and *Perionyx excavatus* on biodegradation of some community wastes in India and Australia. *The Environmentalist* 22: 261–268.
- Tchobanoglous G, Theisen H and Vigil S (1993) *Integrated Solid Waste Management: Engineering Principles and Management Issues*. New York: McGraw-Hill.
- Tsai WT (2008) Management considerations and environmental benefit analysis for turning food garbage into agricultural resources. *Bioresource Technology* 99: 5309–5316.
- Victorian Government Department of Sustainability and Environment (2009) *Metropolitan Waste and Resource Recovery Strategic Plan*. East Melbourne, VIC: Victorian Government Department of Sustainability and Environment.
- Wei YS, Fan YB, Wang MJ and Wang JS (2000) Composting and compost application in China. *Resources, Conservation and Recycling* 30: 277–300.
- Wihersaari M (2005) Evaluation of greenhouse gas emission risks from storage of wood residue. *Biomass and Bioenergy* 28: 444–453.
- Zero Waste South Australia (2005) *South Australia's Waste Strategy 2005–2010*. Adelaide: Zero Waste South Australia.
- Zhang H, He P, Shao L, Qu X and Lee D (2008) Minimizing N₂O fluxes from full-scale municipal solid waste landfill with properly selected cover soil. *Journal of Environmental Sciences* 20: 189–194.